

HARVEST




by MERIDIAN

MODEL	T832	T836	T842	T852	T862
Length	30'	34'	42'	52'	62'
Weight	925 lbs	1000 lbs	1155 lbs	1400 lbs	1650 lbs
(A) Lowered Transport Height	9.9"	12'	11'10"	14'	13'
(B) Max Discharge Height	18'7"	23'7"	25'10"	34'4"	39'3"
Min. PTO HP	15 HP	15 HP	20 HP	20 HP	25 HP
Min. Elec HP**	10 HP	12.5 HP	15 HP	15 HP	15-20 HP
Capacity	2400-3000 bu/hr				

MODEL	T1032	T1036	T1042	T1052	T1062	T1332	T1342
Length	30'	34'	42'	52'	62'	30'	42'
Weight	1300 lbs	1400 lbs	1500 lbs	2020 lbs	2320 lbs	1600 lbs	2150 lbs
(A) Lowered Transport Height	9.9"	11'8"	12'9"	14'	13'	7'10"	13'10"
(B) Max Discharge Height	19'5"	20'5"	25'7"	34'4"	39'3"	21'10"	24'4"
Min. PTO HP	25 HP	30 HP	35 HP	35 HP	45 HP	45 HP	55 HP
Min. Elec HP**	15 HP	20 HP	20 HP	20 HP	25 HP	25 HP	25-30 HP
Capacity	3500-5000 bu/hr				8800-9400 bu/hr		

MODEL	T1036EXT w/ HI-PowerMove™ & hydraulic winch
Auger Length	34' - new 40 ft. length powered to drive under a bin
Weight	1900 lbs
Capacity	3500-5000 BPH

* Capacities & HP requirements will vary depending on commodities & other environmental factors.
 ** When adding Flex Hopper, add 2.5HP to T8/10 Series & 5HP to T13 Series.
 *** Transport & Discharge heights are based on a 16" drawbar height.

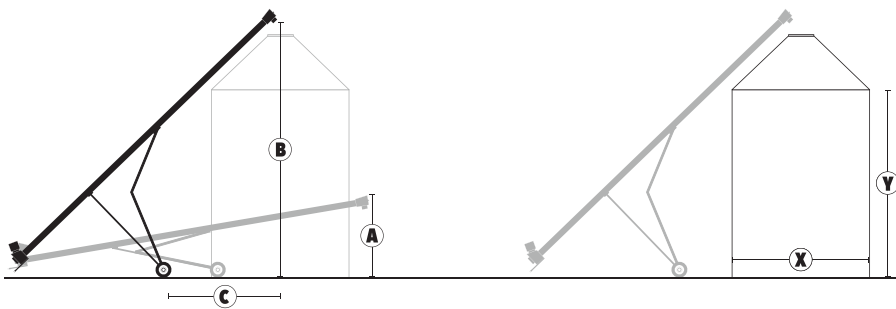

What size auger do you need?

Use the following calculation:

$$\left(\frac{1}{2} \text{ Diameter of bin (X)} + \text{(Y) Eave height of bin}\right) \times 1.5 = \text{Minimum auger length}$$

(Take into account concrete pad)



HARVEST
by MERIDIAN

2902 Expansion Blvd · Storm Lake, IA 50588
 Toll free call: 800.437.2334 · Fax: 712.732.1028
www.harvestauger.com

MERIDIAN
www.meridianmfg.com

T SERIES:

MORE OPTIONS:

T SERIES | Model Shown: T852 electric drive shown

PRECISION ENGINEERING
Fully integrated laser technology

POWDER COAT PLUS™
Better coating & longer lasting

Double tapered bearings
on T10 & T13 models

Interchangeable drive options
PTO & Electric available on all models
Gas on T8-1032 & 36 only

Sealed top drive cover
Grease lubed chain w/ idler

14ga Tubing
12ga on T10 & T13

Extended gearbox mounts

Standard Infeed
Easy to replace with
optional Flex Hopper

Clevis Hitch
Removable

5/16" Flighting at Intake
3/16" remainder on T8 & T10
1/4" remainder on T13

90° Gearbox
Can be switched to either side

Brand new tires & rims
Highway rated w/ easy lube hubs



Flex hopper increases capacity up to 10%
(T8 & 10 single flighting; T13 dual flighting)



Wheel kit & jack w/ guide handle for easy yard maneuvering



PTO Drive Option



Gas drive option: available w/ 19HP Kohler EFI Engine
(only on T832, T836, T1032, T1036 and T1036EXT models)

ADDITIONAL OPTIONS: Hydraulic Lift Option Plastic Hopper



Weather sealed top drive cover



Brand new tires & rims



T1036EXT w/ HI PowerMove™
6' intake extension, powered to drive under a bin.



Flexible 3' discharge spout



Extended lower gearbox mount